NVC UK - NVC Lighting Limited NVC Park 201, Hollymoor Way, Rubery, Birmingham, B31 5HE T +44 (0)121 457 6340 E sales@nvcuk.com NVC NORDICS - NVC Lighting AB Albybergsringen 3b 137 69 Österhaninge T +46(0)8 735 55 40 Sweden info@nvc-lighting.se Finland info@nvclighting.fi Denmark info@nvclighting.dk




DATASHEET

TULSA V4

Tulsa V4 DALI Dim Driver For 28W 600X600 Panel DC Lead

28W DALI Dimmable LED Driver For Panels
Plug & Play On Panel
Loop In / Loop Out Connector For Ease Of Installation



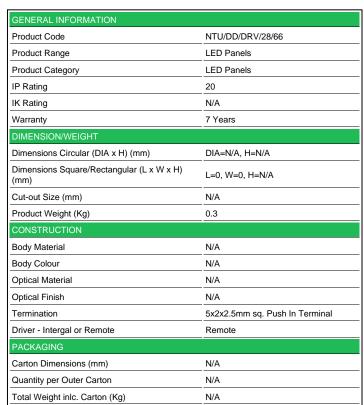



LUMINAIRE PERFORMANCE	
Energy Rating	N/A
Luminaire Lumens (Im)	See panel
Power Consumption (W)	See panel
LED Lumens (Im/W)	N/A
Efficacy (I.Im/c.W)	See panel
Operating Temp. (Min/Max)	-20°C to 25°C
LIGHT SOURCE	
Туре	N/A
Correlated Colour Temp.	N/A
Colour Rendering Index (CRI)	N/A
Lumen Depreciation	N/A
SDCM	N/A
ELECTRICAL INPUT	
VOLTAGE (V)	220-240V AC
Operating Frequency	50
In Rush	19A @ 115us
Drivers per MCB*	B10=32 B16=48 C10=45 C16=68
Class	Class 2
Power Factor	>0.95
Cable Entry	N/A
ELECTRICAL OUTPUT	
Forward Current (mA)	N/A
Forward Voltage (Vf)	N/A
EMERGENCY DATA	
Mode of Operation	N/A
Battery Duration	N/A
Battery Type	N/A
Battery Specification	N/A
Emergency Lumens	N/A
DIMMING	
DALI	Yes
OTHER	N/A
Switch Dim	Yes
Corridor Function	Yes
SENSORS	
Microwave	N/A
PIR	N/A
STANDARDS/APPROVALS	
CE Marked	Yes
Certificate of Conformity	Yes
Accreditations	N/A
BARCODE	
EAN NUMBER	5055943086333
E NUMBER	7982266
* CLUDE ONLY	<u>. </u>

^{*} GUIDE ONLY

